

O-CE8C0-X-YY-X-XX.XXX MHz Phase-Locked SC-cut Clean-up OCXO in Europack

Product Data Sheet

Features



- SC-cut crystal
- Low Phase Noise
- Very Compact Package

Applications

- Significantly improves Phase Noise of incoming signal with optional Higher Frequency Output
- COTS/Dual use

Pinout

- Pin #1 - 10 MHz Input
- Pin #2 - Vref
- Pin #3 - Vcc
- Pin #4 - Lock Detect
- Pin #5 - RF OUT
- Pin #6 - Case, GND
- Pin #7 - Input Signal Detect
- Pin #8 - Vset.

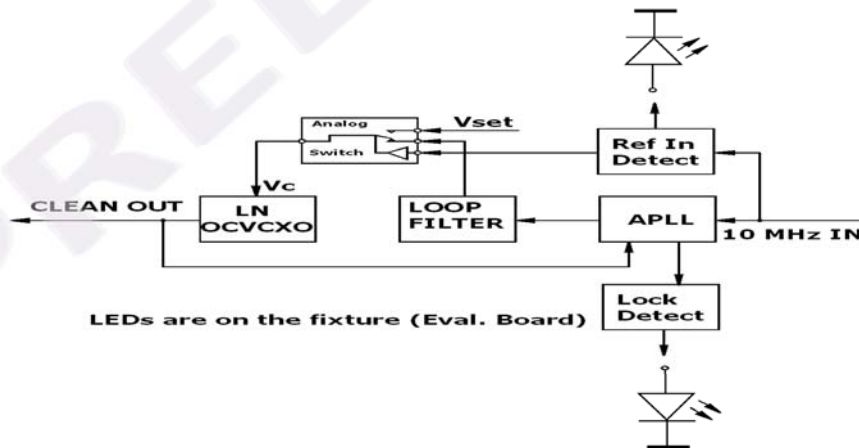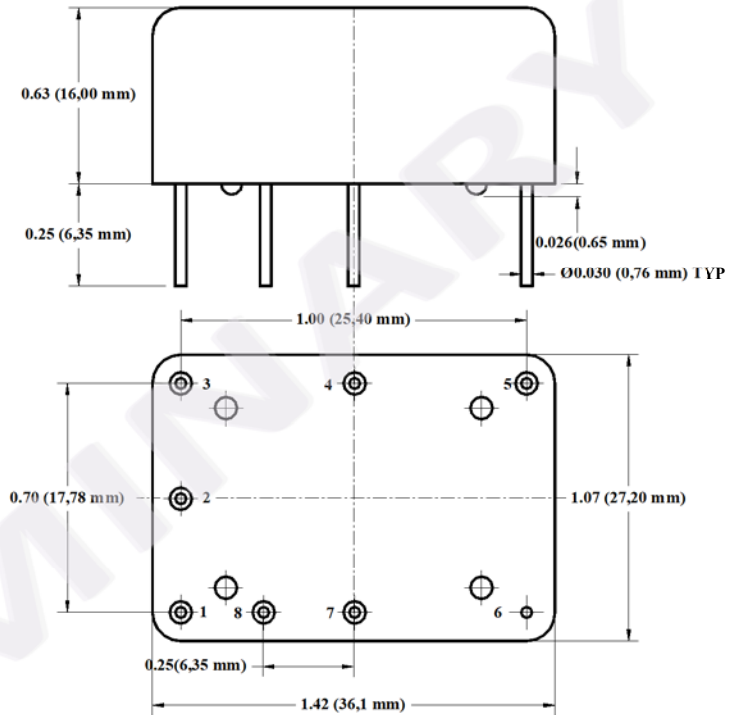

Specifications:

Parameter	Symb	Condition	Min	Typ	Max	Unit	Note
Absolute Maximum Ratings							
Input Break Down Voltage	Vcc		-0.5		5.5	V	Vcc = 5 V
Operating Temp.	To		0		70	°C	
Operable Temp.	TO		-40		85	°C	
Storage temper.	Ts		-40		85	°C	

Electrical High Frequency

Input Frequency	Fin			10.000		MHz	
Output Frequency	Fout		10	100.000	125.000	MHz	
Frequency Capture Range (APR)	ΔF/F	Over All	±600			ppb	When input signal disappears free run within 100 ppb as shipped, 1,500 ppb over 10 years
Allan Deviation		.01s to 0.1s		5E-11			
Frequency stability	ΔF/F	Locked	Equal to incoming signal				
Recommended MAX Input SSB Phase Noise	£(Δf)	10 Hz			-80	dBc/Hz	
		100 Hz			-110		
		1 KHz			-130		
		10 KHz			-140		
		100 KHz			-140		
Input signal		CMOS	2			Vpk-pk	Code T
		Sine Wave	0		15	dBm	Code S
Output SSB Phase Noise Floor	£(Δf)	10Hz			-90	dBc/Hz	Grade "C"
		100Hz			-125		
		1KHz			-153		
		10KHz			-170		
		100KHz			-175		
Output SSB Phase Noise Floor	£(Δf)	10 Hz			-100	dBc/Hz	Grade "L"
		100 Hz			-130		
		1 KHz			-158		
		10 KHz			-175		
		100 KHz			-180		
Output SSB Phase Noise Improvement Compared to Input Phase Noise adjusted to 10 MHz		10 Hz		20		dBc/Hz	Should add 20LogN, 20 dB for 100 MHz Cannot improve beyond listed above noise floor
		100 Hz		50			
		1 KHz		50			
		10 KHz		50			
		100 KHz		50			
G-sensitivity		worst direction			±1.0	ppb/G	
Input Voltage	Vcc	Code 0	4.75	5.0	5.25	V	
Power consumption	P	steady state, 25°C start-up @ -30°C		1.3	1.6	W	Standard Operating Temperature, for Op Temp. 85 °C add 20% Still air for all Lower P available, consult Factory
				2.8	3.5		
Spectral Purity		Subharmonics Spurious Harmonics		-70	-50	dBc	10 MHz and multiples Output Code S
				-35	-30		
Load	Internally AC coupled 50 Ohm (Sinewave) 10K Ohm//15pf (CMOS/TTL)						
Warm-up time	τ	to lock on 100 ppb input		3	5	minutes	
Lock Time after warm-up				1		minute	

All parameters for output frequency 100 MHz

Parameter	Symb	Condition	Min	Typ	Max	Unit	Note
Output Power	Pout	Into 50 Ohm	15	17		dBm	Output Code S
Logic 1 (CMOS)	Voh		0.7Vref			V	Output Code T
Logic 0 (CMOS)	Vol				0.1Vref	V	Output Code T
Duty Cycle			45/55		55/45	%	Output Code T
Rise/Fall Time	Tr/Tf			2	3	ns	Output Code T
Preset Voltage	Vset			2.25		V	Can be externally adjusted by LN Potentiometer 10 KOhm between Vref and GND
Lock Detect				Logic "1"			Can drive LED
Input Detect				Logic "1"			Can drive LED
Electrical Low Frequency							
Output Frequency				10		MHz	
Recommended Input SSB Phase Noise	$\xi(\Delta f)$	10 Hz			-90	dBc/Hz	
		100 Hz			-110		
		1 KHz			-130		
		10 KHz			-140		
		100 KHz			-140		
Frequency Capture Range (APR)	$\Delta F/F$	Over All	± 100			ppb	When input signal disappears free run within 0.3ppb Max as shipped, 1,000 ppb over 10 years
Allan Deviation		.01s to 0.1s		5E-12			
Output SSB Phase Noise Floor	$\xi(\Delta f)$	10 Hz			-125	dBc/Hz	Grade "C"
		100 Hz			-145		
		1 KHz			-162		
		10 KHz			-165		
		100 KHz			-169		
		10 Hz			-145	dBc/Hz	Grade "U"
		100 Hz			-157		
		1 KHz			-165		
		10 KHz			-168		
		100 KHz			-172		
Output SSB Phase Noise Improvement Compared to Input Phase Noise		10 Hz 100 Hz 1 KHz 10 KHz 100 KHz		45 50 50 50 50		dBc/Hz	Cannot improve beyond the noise floor for each grade as listed above

All Parameters for 10,000 MHz Output

Environmental and Mechanical

Operating temp. range	0°C to 70°C Standard, Other options – see chart below
Mechanical Shock	Per MIL-STD-202, 30G, 11ms , survival
Vibration	Per MIL-STD-202, 5G to 2000 Hz, Survival


Electrical Connections

Notes:

* Close to the carrier noise floor is frequency dependent and will be lower at lower frequencies and higher at higher ones. Will be specified on PO.
All parameters, unless otherwise specified, are at nominal conditions, ie: T=25°C, Nominal Vcc & Nominal



Creating a Part Number

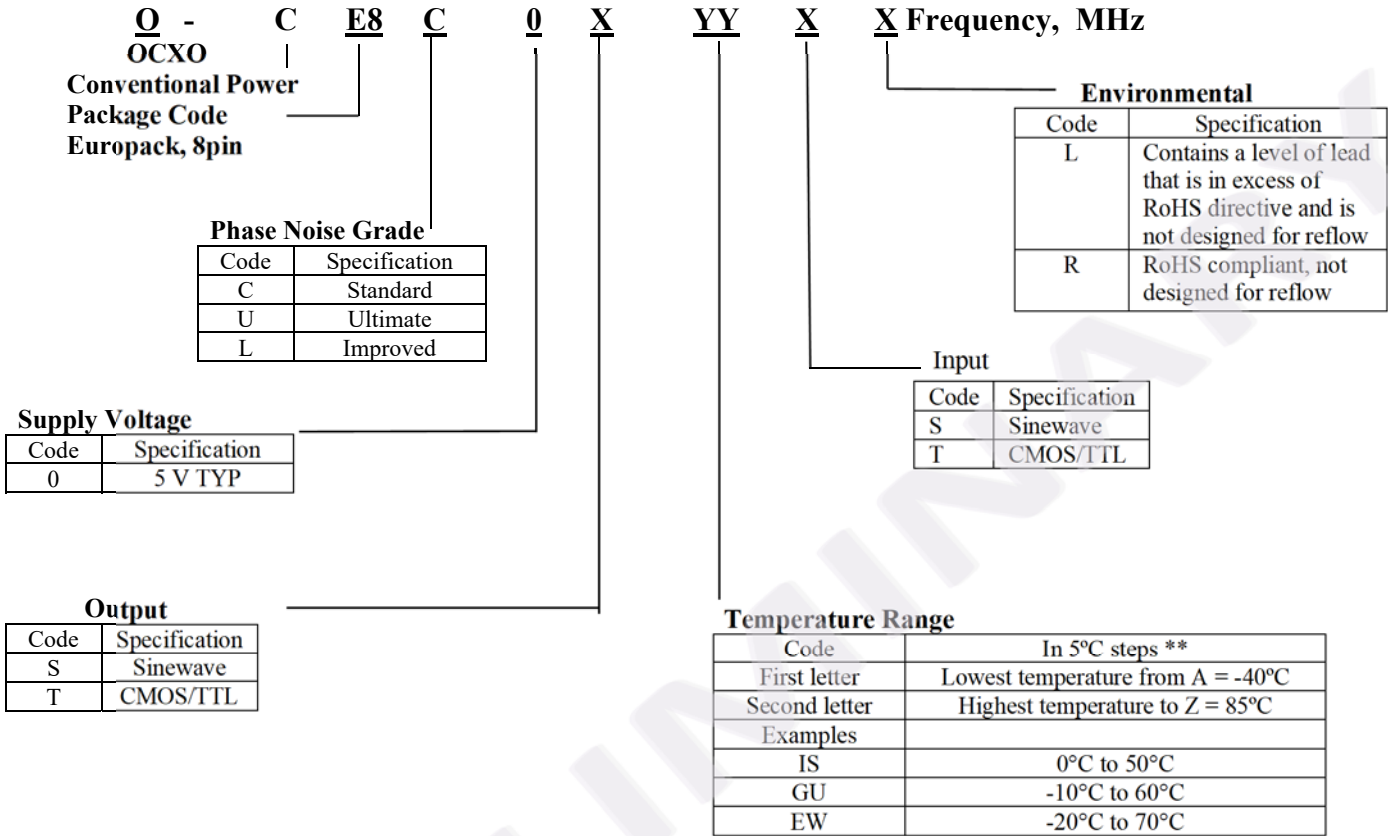

**Temperature Code Table

Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C
A	-40	F	-15	K	10	P	35	U	60	Z	85
B	-35	G	-10	L	15	Q	40	V	65		
C	-30	H	-5	M	20	R	45	W	70		
D	-25	I	0	N	25	S	50	X	75		
E	-20	J	5	O	30	T	55	Y	80		