

Contact Us



About NEL



Products



ネル社について

Design-in Our BEST Ultra Low Phase Noise OCXO

In a 36 x 27 mm "Europack"

Features

- SC-cut crystal
- High Stability
- Outstanding ADEV
- Improved Ultra Low Phase Noise
Extraordinary (E) -91 dBc/Hz at 0.1 Hz
-123 dBc/Hz at 1 Hz
-151 dBc/Hz at 10 Hz
-172 dBc/Hz on the floor
- Extraordinary Low ADEV

Applications


- Instrumentation
- Telecommunication Systems
- COTS/Dual use
- GPS
- Radar




[Specifications](#)

[Contact NEL](#)

10 MHz Output Frequency

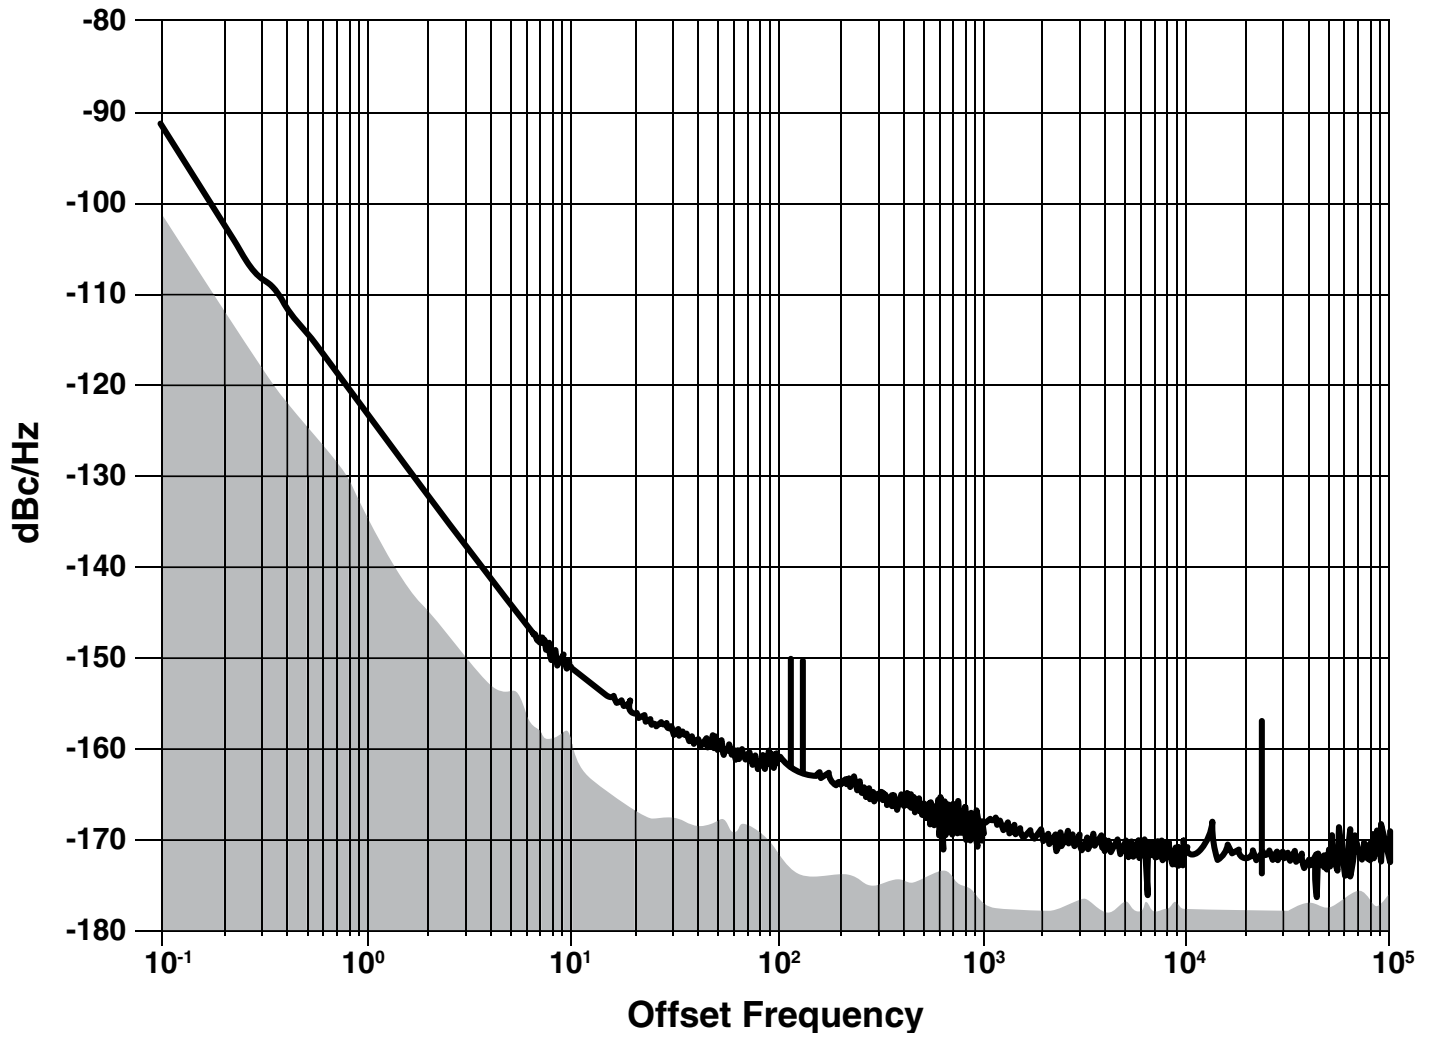

ADEV

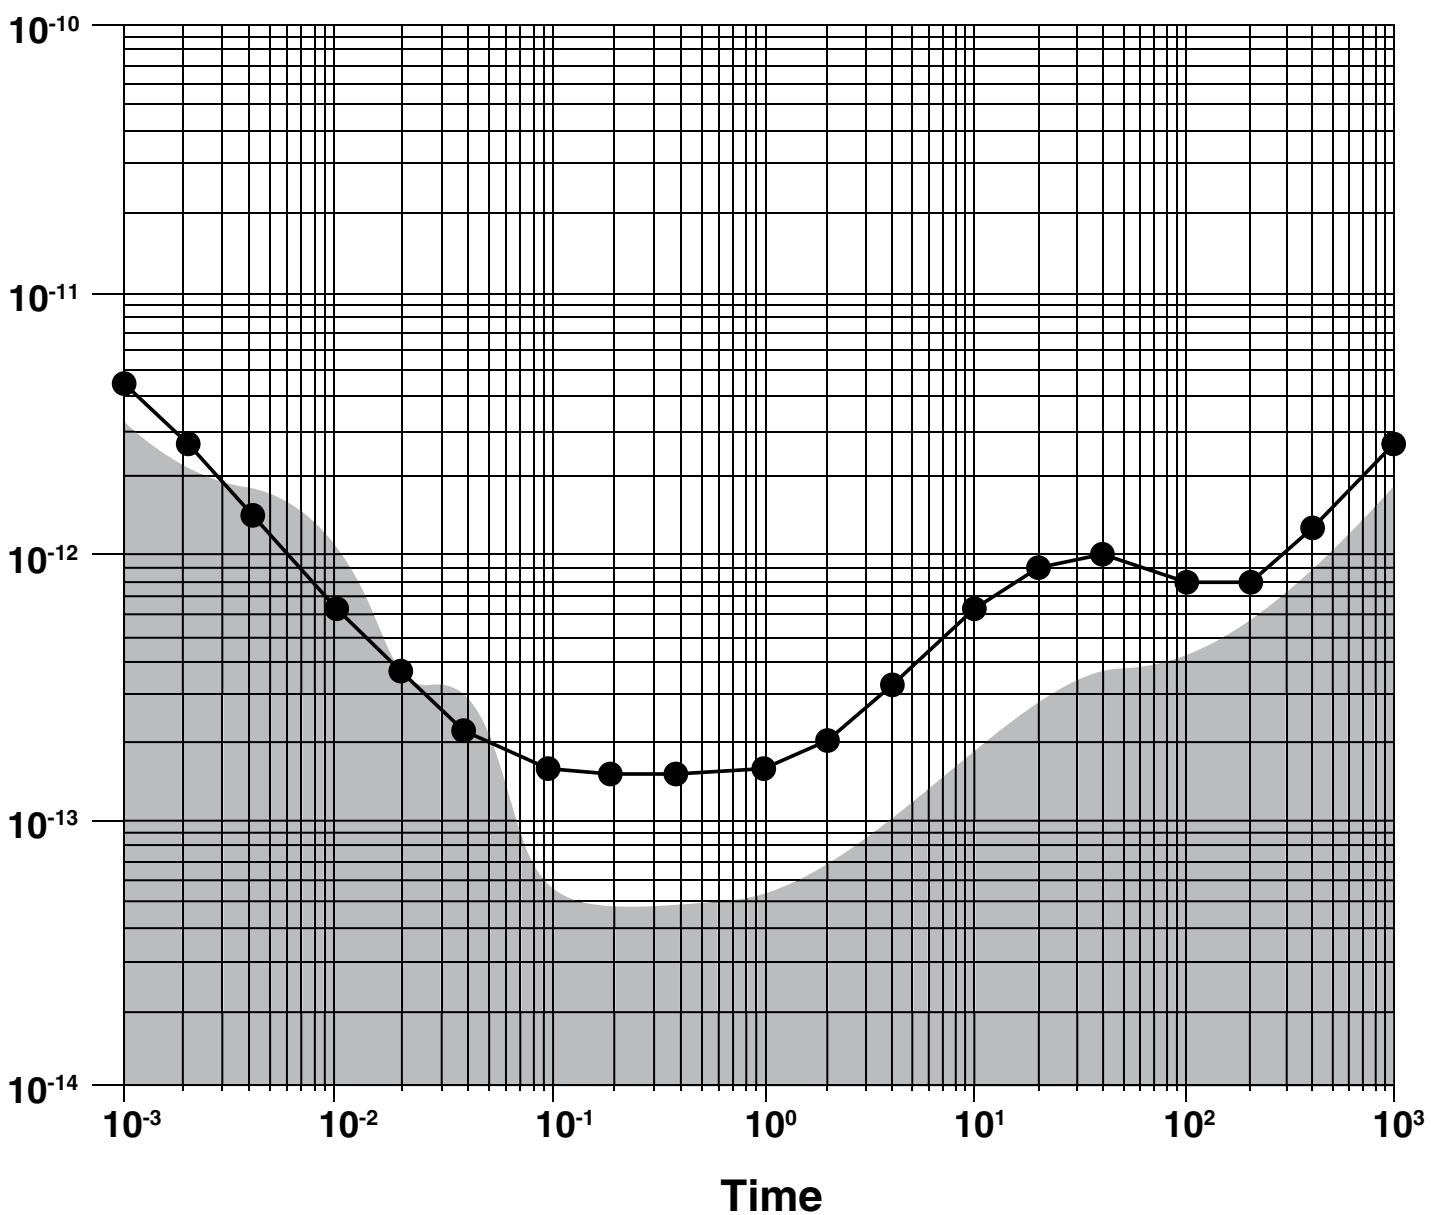

[Follow us](#) on LinkedIn for updates on industry news!