

O-CXM-XYZXX-X-X-XX-X

Precision Ultra Low Phase Noise OCXO in 36x27 mm “Europack” with optional Adapter to 2”x2”

Product Data Sheet

Description


O-CX...Series is based on Ultra Low Noise 10 MHz reference OCXO and low noise analog multiplier to achieve higher frequencies multiple of 10 MHz

Features


- SC-cut crystal
- High Stability
- Ultra Low Aging
- Ultra Low Phase Noise
- Sine Wave or HCMOS/TTL output

Applications

- Instrumentation
- Telecommunication Systems
- Data Communications
- GPS
- COTS/Dual use

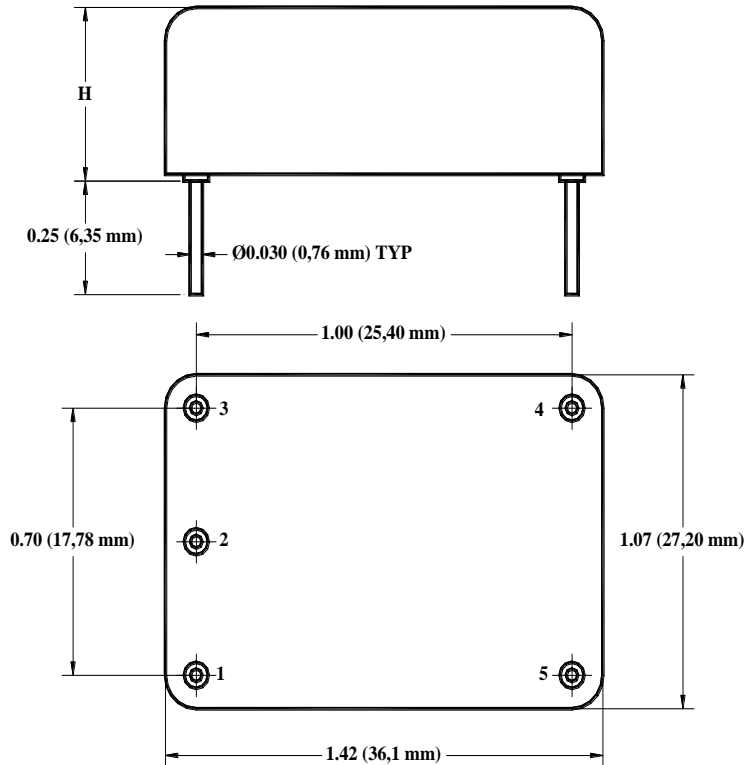

Height H is 0.75” TYP – standard.
For special requirements 0.63” TYP height can be considered – consult factory

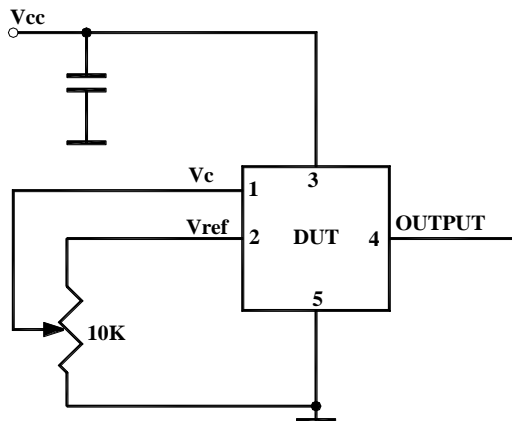

Parameter	Symb	Condition	Min	Typ	Max	Unit	Note
Absolute Maximum Ratings							
Input Break Down Voltage	V _{cc}	12 V supply 5 V supply	-0.5 -0.5		13.0 5.5	V	
Storage temper.	T _s		-50		90	°C	
Control Voltage	V _c		-1 -5		5.5 5	V	Slope option "P" Slope option "N"

Electrical (4)

Frequency	F		20		100	MHz	
Frequency stability	$\Delta F/F$	vs. Temp.		± 10		ppb	See chart below
		vs. Supply		0.2	0.3	ppb/10% V _{cc}	
Aging		per day		5E-10			after 30 days
		per year, first year		1E-7			5E-8 available
		second year		3E-8			
		per day		1E-10			Option 01
		per first year		2E-8			Option 01
		Following years		1E-8			Option 01
Allan Deviation		.1s to 1s		1E-12			PN grade "U"
SSB Phase Noise of 10 MHz reference. Values at actual operating frequency are higher by approximately 20LogN (N = F, MHz/10) at all frequency offsets from the carrier (achieved after 10 minutes warm-up). Example: for F = 50 MHz at 10 Hz offset of the standard version S_φ = -126 dBc/Hz	S _φ	1Hz				-110	Standard version, option L
		10 Hz				-140	
		100 Hz				-155	
		1 KHz				-162	
		10 KHz				-170	
		100 KHz				-172	
		1Hz				-112	Premium version, option P
		10 Hz				-145	
		100 Hz				-158	
		1 KHz				-165	
		10 KHz				-170	
		100 KHz				-172	
		1Hz				-115	Ultimate version, option U 2*
		10 Hz				-146	
		100 Hz				-158	
		1 KHz				-165	
		10 KHz				-170	
		100 KHz				-172	
		1Hz				-120	Extraordinary version, Option E, available with slope options N or L
		10 Hz				-148	
100 Hz				-160			
1 KHz				-168			
10 KHz				-170			
100 KHz				-173			
SSB Phase Noise, F = 100.000 MHz	S _φ	1Hz				-90	Standard version, option L
		10 Hz				-120	
		100 Hz				-135	
		1 KHz				-142	
		10 KHz				-150	
		100 KHz				-152	
		1Hz				-92	Premium version, option P
		10 Hz				-125	
		100 Hz				-138	
		1 KHz				-145	
		10 KHz				-150	
		100 KHz				-152	

Phase Noise values are converted back to 10 MHz reference. Values at actual frequency are higher by approximately 20LogN (N = F, MHz/10) at all frequency offsets from the carrier

		1Hz 10 Hz 100 Hz 1 KHz 10 KHz 100 KHz			-95 -126 -138 -145 -150 -152		Ultimate version, option U 2*
		1Hz 10 Hz 100 Hz 1 KHz 10 KHz 100 KHz			-100 -128 -140 -148 -150 -153		Extraordinary version, Option E, available with slope options N or L
Retrace		After 30 minutes			±10	ppb	24 Hours off 3*
G-sensitivity		worst direction			±1.0	ppb/G	
Input Voltage	Vcc		4.75 11.4	5.0 12.0	5.25 12.6	V	See chart below to specify
Power consumption, Still air	P	steady state, 25°C steady state, -30°C start-up @ -30°C		1.0 1.7 2.5	1.4 3.2	W	Standard Operating Temperature*
Spectral Purity		Sub-harmonics Spurious Harmonics/Sine		-50 -35	-80 -30	dBc	
Load		10KOhm/15pF (HCMOS/TTL), AC-coupled 50 Ohm (Sine-wave)					Output Code T Output Code S
Warm-up time	τ	to 0.1ppm accuracy		3	5	minutes	
Output Waveform		HCMOS/TTL compatible or Sinewave					
Output Power			+5	+10		dBm	Output Code S
Logic 1 (CMOS)	Voh		0.9 Vref			V	Output Code T
Logic 0 (CMOS)	Vol				0.1 Vref	V	Output Code T
Control voltage	Vc		0 -4.0 0		Vref 4.0 10	V	Slope option "P" Slope option "N" Slope option "L"
Input impedance	Zin	At Vc pin	10			KOhm	
Modulation bandwidth	Fm		DC		1	KHz	Note 5
Reference Voltage	Vref	Vcc = 12V Vcc = 5V		5 or 4.5 4.5		V	
Output Impedance		At Vref pin		100		Ohm	
Pull range		from nominal F	±0.3 ±0.4	±0.5 ±0.6		ppm	Slope option "P" Slope option "N"
Deviation slope		Monotonic, positive Monotonic, negative Monotonic, positive		1.0/Vref -0.13 -0.12		ppm/V	Slope option "P" Slope option "N" Slope option "L"
Setability	Vc0	@25°C, Fnom. No internal bias for slope option "L"		Vref/2 ± 0.5 0 ± 0.5 5 ± 0.5		V	Slope option "P" 3* Slope option "N" Slope option "L"

Notes: *. For highest operating temperature higher than 70°C the power consumption will be higher (about 20% for 85°C).

Values listed are for test in still air environment, the values will go up while testing in the temperature chamber.

- 2*. It is recommended to specify Slope option "N" for Ultimate Phase noise performance. For recommended phase noise test, contact factory. It's assumed that phase noise test is performed under static conditions (no vibration), in still air, and care is taken for minimizing EMI.
- 3*. Longer storage time, especially at low temperatures, may affect both retrace and setability parameters. It may require few days on power for re-stabilization.
4. All parameters, unless otherwise specified, are at nominal conditions, ie: T=25°C, Nominal Vcc & Nominal Load.
5. Older and stock units may have MBW of 150 Hz Max.

6. Either potentiometer or fixed resistors (if used) for fine frequency adjustment must be metal, low noise to maintain specified phase noise.

Environmental and Mechanical

Operating temp. range	-30°C to 70°C Standard, Other options – see chart below
Mechanical Shock	Per MIL-STD-202, 30G, 11ms
Vibration	Per MIL-STD-202, 5G to 2000 Hz
Soldering Conditions	260°C for 10s Max leads only

Electrical Connections

Pin Out	Pin #1-Vc ; Pin#2 – Vref; Pin #3 – Vcc; Pin #4- Output ; Pin #5- GND;
----------------	---

Creating a Part Number

Q - **C** **X** **M** **X** **X** **YZ** **XX** - **X** - **X** - **XX** - **X** **FREQ**
OCXO

Conventional Power

Multiplied

Package Code

E 5 pin 36x27mm

A for adapter

Supply Voltage

Code	Specification
0	5V ± 5%
F	12V ± 5%

Output

Code	Specification
T	CMOS/TTL
S	Sinewave

Temperature Stability

Code	Specification
17	1x10 ⁻⁷
58	5x10 ⁻⁸
28	2x10 ⁻⁸
18	1x10 ⁻⁸
59	5x10 ⁻⁹
YZ	Yx10 ^{-Z}

Temperature Range

Code	In 5°C steps **
First letter	Lowest temperature from A = -40°C
Second letter	Highest temperature to Z = 85°C
Examples	
AZ	-40°C to 85°C
GU	-10°C to 60°C
EW	-20°C to 70°C

Environmental

Code	Specification
L	Contains a level of lead that is in excess of RoHS directive and is not designed for reflow
R	RoHS compliant, not designed for reflow

Aging

Insert Value per day times 1E-10	
Examples	
5	5E-10 = 0.5 ppb/day
10	1E-9 = 1 ppb/day
01	1E-10 = 0.1 ppb/day

Phase Noise (See Table)

Code	Specification
L	Standard
P	Premium
U	Ultimate
E	Extraordinary

Deviation slope

Code	Specification
P	Positive, 0 to Vref
N	Negative, -4 to 4V
L	Positive, 0 to 10V




Not all combinations are available. Consult Factory.

****Temperature Code Table**

Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C
A	-40	F	-15	K	10	P	35	U	60	Z	85
B	-35	G	-10	L	15	Q	40	V	65		
C	-30	H	-5	M	20	R	45	W	70		
D	-25	I	0	N	25	S	50	X	75		
E	-20	J	5	O	30	T	55	Y	80		

Optional adapter for 2"x 2" compatibility:

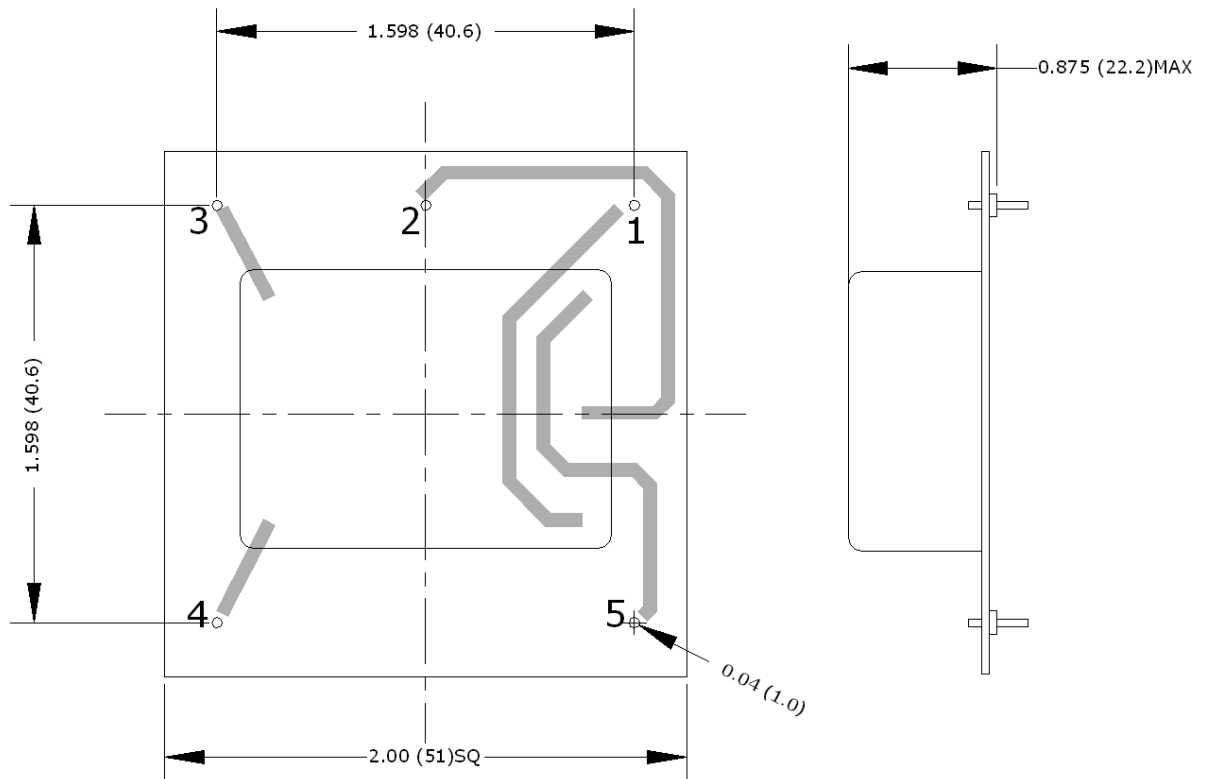

Adapter Pin Out	Pin #1-Vc ; Pin#2 – Vref; Pin #3 – Output; Pin #4- GND ; Pin #5- Vcc;
------------------------	---

