

**O-CIH-XXXXXXXX-X Very Low Phase Noise** Rev. S  
**Precision SC-cut HF OCXO in 1"x1" Through Hole Package**


**Product Data Sheet**

**Features**

- SC-cut crystal
- Ultra Low Phase Noise
- Sine Wave +17 dBm output
- Compact package

**Applications**

- Radar
- Instrumentation and Test Equipment
- Synthesizers
- References

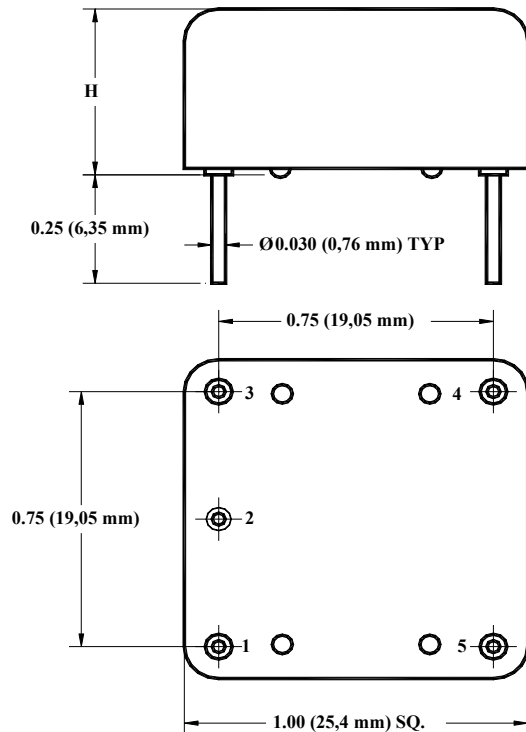

Stand-off positions may vary.

H Code	Height, inches, Typ
4	0.4 (10.2 mm)
5	0.5 (12.7 mm)

Code 5 is standard unless code 4 is requested.

Parameter	Symb	Condition	Min	Typ	Max	Unit	Note	
<b>Absolute Maximum Ratings</b>								
<b>Input Break Down Voltage</b>	V <sub>cc</sub>		-0.5		13.0	V	V <sub>cc</sub> option F V <sub>cc</sub> option 0	
<b>Storage temper.</b>	T <sub>s</sub>		-55		85	°C		
<b>Control Voltage</b>	V <sub>c</sub>		-1		10	V		
<b>Electrical (1)</b>								
<b>Frequency</b>	F		80		128	MHz		
<b>Frequency stability</b>	ΔF/F	vs. Temp.		±50		ppb	See table below	
		vs. Supply			2	ppb/5% change		
		Vs. load			2	ppb/5% change		
<b>Aging</b>		per day per first year 10 years		5E-9 5E-7		ppm	After 30 days of continuous operation	
<b>Allan Deviation</b>		.01s to 1s		5E-11				
<b>SSB Phase Noise</b>	£(Δf)	10 Hz				-95	dBc/Hz	Grade "L"
		100 Hz				-125		
		1 KHz				-158		
		10 KHz				-170		
		≥100 KHz				-178		
		10 Hz				-100		Grade "P"
		100 Hz				-130		
		1 KHz				-160		
		10 KHz				-172		
		≥100 KHz				-178		
		10 Hz			-105			Grade "U", Available with slope option "L"
		100 Hz			-135			
		1 KHz			-162			
		10 KHz			-175			
		≥100 KHz			-178			
		10 Hz			-138	-105		Grade "E" Available with slope option "L", V <sub>cc</sub> option "0" (5V) only
100 Hz			-166					
1 KHz			-182					
10 KHz			-187					
≥100 KHz			-185					
<b>Retrace</b>		After 30 minutes		±20		ppb		
<b>G-sensitivity</b>		worst direction			±0.5	ppb/G		
<b>Input Voltage</b>	V <sub>cc</sub>	12V±5%	11.4	12.0	12.6	V	Option "F"	
		5V±5%	4.75	5.0	5.25	V	Option "0"	
<b>Power consumption</b>	P	steady state, 25°C		1.2	1.5	W	Still air	
		steady state, -40°C		2.5				
		start-up		3.0	3.5			
<b>Spectral Purity</b>		Output power	13	17		dBm	Non-supply related	
		Subharmonics		none		dBc		
		Spurious			-80			
		Harmonics		-35	-30			
<b>Load</b>	50 Ohm (Internally AC-coupled)							
<b>Warm-up time</b>	τ	to 0.1ppm accuracy		3	5	minutes		
<b>Output Waveform</b>	Sine-wave							
<b>Control voltage</b>	V <sub>c</sub>		0		10.0	V	Slope option "L" Slope option "P"	
			0		4.5			
<b>Pull range</b>		from nominal F		±3.0		ppm		
<b>Modulation Bandwidth</b>	MBW	V <sub>c</sub> port input LPF 3dB cut-off freq.	DC		1	KHz	Note 3	
<b>Absolute pull range</b>	APR	Over all conditions	±0.5			ppm		

All parameters for 100.000 MHz

<b>Deviation slope</b>		Monotonic, posit		0.7 1.3		ppm/V	Slope option "L" Slope option "P"
<b>Linearity</b>			±10%				
<b>Reference Voltage</b>	Vref			N/A 4.5		V	Slope option "L" Slope option "P"
<b>Setability</b>	Vc0	@25°C, Fnom.	4.0 1.75	5.0 2.25	6.0 2.75	V	Slope option "L", no bias Slope option "P"

Note: 1. All parameters, unless otherwise specified, are at nominal conditions, ie: T=25°C, Nominal Vcc & Nominal Load.  
3. Older and stock units may have MBW of 150 Hz Max.

**Environmental and Mechanical**

<b>Operating temp. range</b>	0 to 70°C Standard, Other options – see Chart below **
<b>Mechanical Shock</b>	Per MIL-STD-202, 30G, 11ms
<b>Thermal Shock</b>	Per MIL-STD 883, Method 1011, Condition A
<b>Vibration</b>	Per MIL-STD-202, 5G to 2000 Hz
<b>Operational vibration</b>	Phase noise under vibration to be verified by the customer
<b>Seal</b>	Per MIL-STD 883, Method 1014, Cond A and Cond C
<b>Soldering Conditions</b>	260°C for 10s Max leads only

**Electrical Connections**

<b>Pin Out</b>	Pin #1- Output ; Pin #2 – GND; Pin #3 – Voltage Control; Pin#4 – Vref or NC; Pin#5 - Vcc
----------------	--

**Creating a Part Number**

**O - C I H - X X X XX XX X - X - Freq**

OCXO

Conventional Power

**Package Code**  
I 5 pin 1"x1"  
Height Code per Dwg

**Supply Voltage**

Code	Specification
F	12V ±5%
0	5.0V ±5%

**Control Voltage**

Code	Specification
L	0 to 10 V
P	0 to 4.5 V

**Output**

Code	Specification
S	Sinewave

**Temperature Stability**

Code	Specification
17	1x10 <sup>-7</sup>
58	5x10 <sup>-8</sup>
28	2x10 <sup>-8</sup>
YZ	Yx10 <sup>-Z</sup>

**Environmental**

Code	Specification
L	Contains a level of lead that is in excess of RoHS directive and is not designed for reflow
R	RoHS compliant, not designed for reflow

**Phase Noise Grade (see table)**

Code	Specification
L	Standard
P	Premium
U	Ultimate
E	Extraordinary

**Temperature Range**

Code	In 5°C steps **
First letter	Lowest temperature from A = -40°C
Second letter	Highest temperature to Z = 85°C
Examples	
IS	0°C to 50°C
GU	-10°C to 60°C
EW	-20°C to 70°C

**\*\*Temperature Code Table**

Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C
A	-40	F	-15	K	10	P	35	U	60	Z	85
B	-35	G	-10	L	15	Q	40	V	65		
C	-30	H	-5	M	20	R	45	W	70		
D	-25	I	0	N	25	S	50	X	75		
E	-20	J	5	O	30	T	55	Y	80		

Note 2 \*\*: The units will be functional down to -55°C with expected deterioration of frequency Stability by up to 2ppm.

**Phase Noise Plot:**

**100 MHz Output Frequency**

