

Phase-Locked Ultra Low Phase Noise Multioutput Frequency Reference in 19" Rack Mountable Appliance 1U Form Factor

Product Data Sheet

Features

- Locks to 1 PPS or 10 MHz inputs
- Ultra-Low Phase Noise (ULPN)
- 10 MHz, 100 MHz, and 1 PPS Outputs
- 10 MHz and 100 MHz internal SC-cut OCXO
- PPS OUT Edge Aligned with 100 MHz Output

Applications


- Radar
- 5G device testing
- Instrumentation, Test and Measurement
- Mixed Signal System Reference
- COTS/Dual use

Inputs


1 PPS IN on SMA Female
10 MHz on SMA Female

Outputs

100 MHz OUT SMA Female
10 MHz OUT SMA Female
1 PPS OUT SMA Female

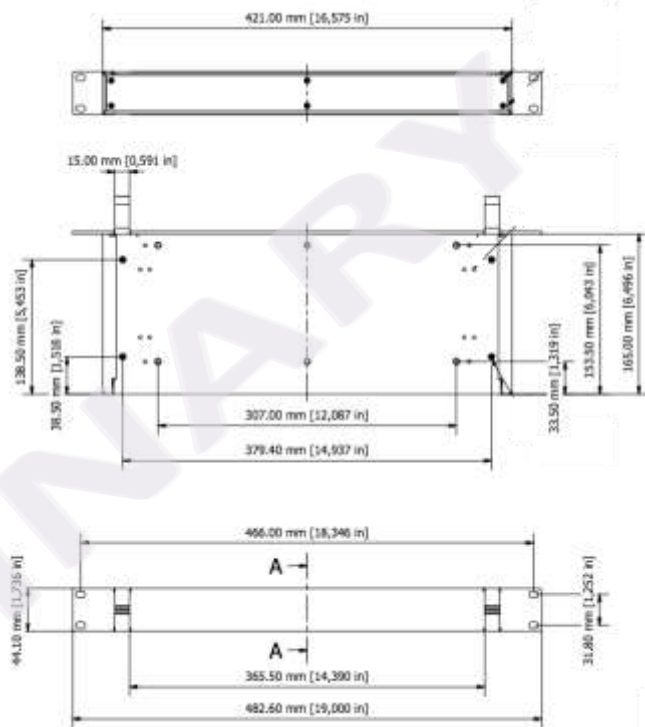


Mechanical Dimensions

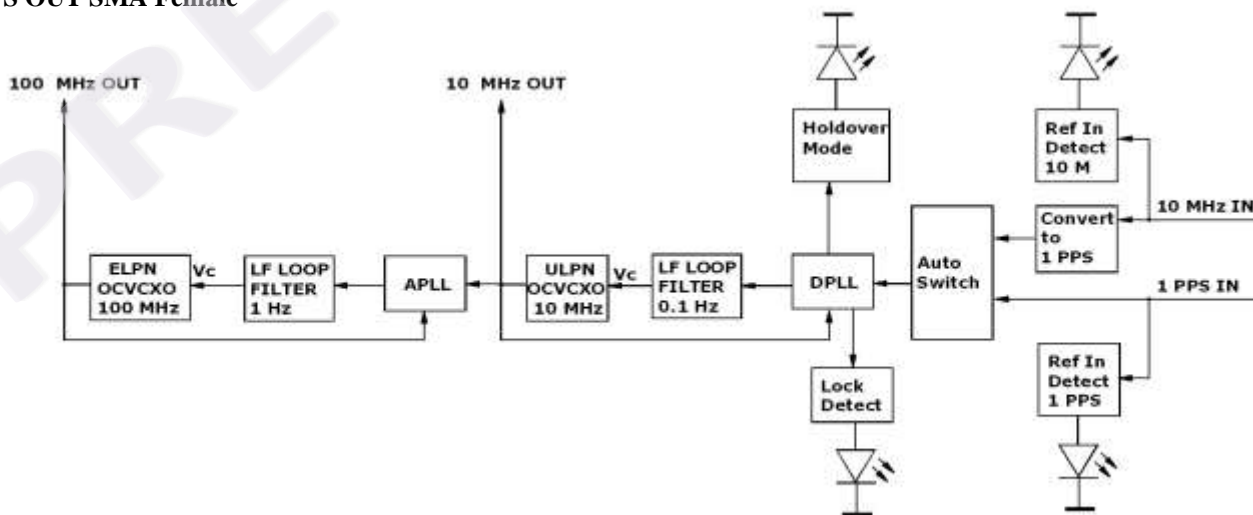

Ultra Low Phase Noise Phase-Locked Frequency Reference

Data Sheet 2030B

Front Panel

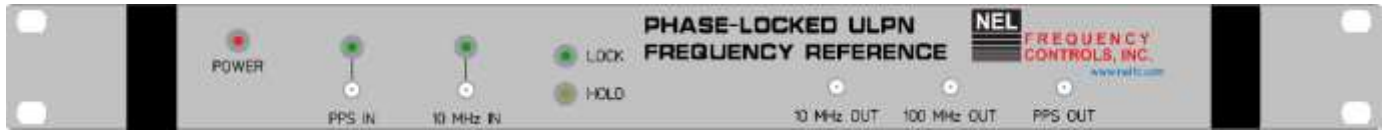

Specifications:

Parameter	Symb	Condition	Min	Typ	Max	Unit	Note
Absolute Maximum Ratings							
Power supply	Vp		90		260	V AC	
Operating Temp.	To		10		45	°C	
Storage temper.	Ts		0		70	°C	
Electrical							
	Fpps	1 PPS input		1		Hz	
1PPS in	1 PPS	TTL		2.5		V pk-pk	Green LED,
		Pulse Width		1		us	
		Load		50		Ohm	AC coupled
Frequency Capture Range (APR)	$\Delta F/F$	Over All	± 100			ppb	Includes variation vs. temperature, load, aging 10 years
Allan Deviation		.01s to 1s		1E-12			
Frequency stability	$\Delta F/F$	Locked Holdover	Equal to incoming signal ± 5			ppb	Over temperature
Holdover	τ	8 hours		20		us	
Recommended MAX Input SSB Phase Noise	$\mathcal{L}(\Delta f)$	10 Hz			-90	dBc/Hz	10 MHz reference
		100 Hz			-120		
		1 KHz			-130		
		10 KHz			-140		
		100 KHz			-140		
Output SSB Phase Noise Improvement Compared to Input Phase Noise adjusted to 10 MHz	$\mathcal{L}(\Delta f)$	10 Hz		40		dBc/Hz	Cannot improve beyond listed below Output Phase Noise
		100 Hz		50			
		1 KHz		50			
		10 KHz		50			
		100 KHz		50			
Output Frequencies	F10			10.000		MHz	SMA
	F100			100.00			SMA
	PPS			1		Hz	SMA
Misalignment rising edge PPS with rising endge 100 MHz					2	ns	
SSB Phase Noise (achieved after 10 minutes warm-up) Noise floor	$\mathcal{L}(\Delta f)$	1Hz		-115		dBc/Hz	10 MHz output
		10 Hz		-145			
		100 Hz		-157			
		1 KHz		-162			
		10 KHz		-170			
		100 KHz		-172			

Ultra Low Phase Noise Phase-Locked Frequency Reference

Data Sheet 2030B

		10 Hz 100 Hz 1 KHz 10 KHz 100 KHz		-125 -132 -163 -177 -180			100 MHz output
Output	F100			100.00		MHz	SMA
	F10			10.000			
	1 PPS		Buffered internally				
Power Requirements	P	IEC320 on the back	100 to 250 V AC 50/60 Hz Consumption 20 Watts			V AC	
Output Waveform	Sinewave						RF output
Output Power			+13	+15		dBm	100 MHz
			+12	+14			10 MHz
Spectral Purity		Subharmonics Spurious Harmonics		-70 -35	-50 -80 -30	dBc	10 MHz and multiples on 100 MHz Output
Load	Internally AC coupled 50 Ohm (Sinewave)					RF output	
Warm-up time	τ	to lock on 100 ppb input		3	5	minutes	
Lock Time after warm-up					20	minutes	
Lock Detect			Green LED				
Holdover Mode			Green LED				

Environmental and Mechanical

Operating temp. range	+10°C to +45°C
Storage Temp. Range	0°C to +70°C

