



FREQUENCY CONTROLS

Powered By **ABRACON**



Contact Us



About NEL



Products



ネル社について

Extraordinarily Low Phase Noise

In a 36x27 mm "Europack"

This device is based on lower frequency SC-cut OCXO with Low Noise analog multiplier to achieve frequency range of 500 MHz to 1.3 GHz.



Features

- Fast Cold Start Option available
- UHF
- Ultra Low Phase Noise
- Low Spurious
- +12 dBm Sine Wave output
- Standard frequencies: 1.000 GHz and 1.280 GHz

Applications


- Instrumentation
- GPS
- Synthesizers
- Microwave/RF
- Radar
- COTS/Dual use

Specifications

Evaluation Unit? Contact NEL

1 GHz Output Frequency

NOISE XT

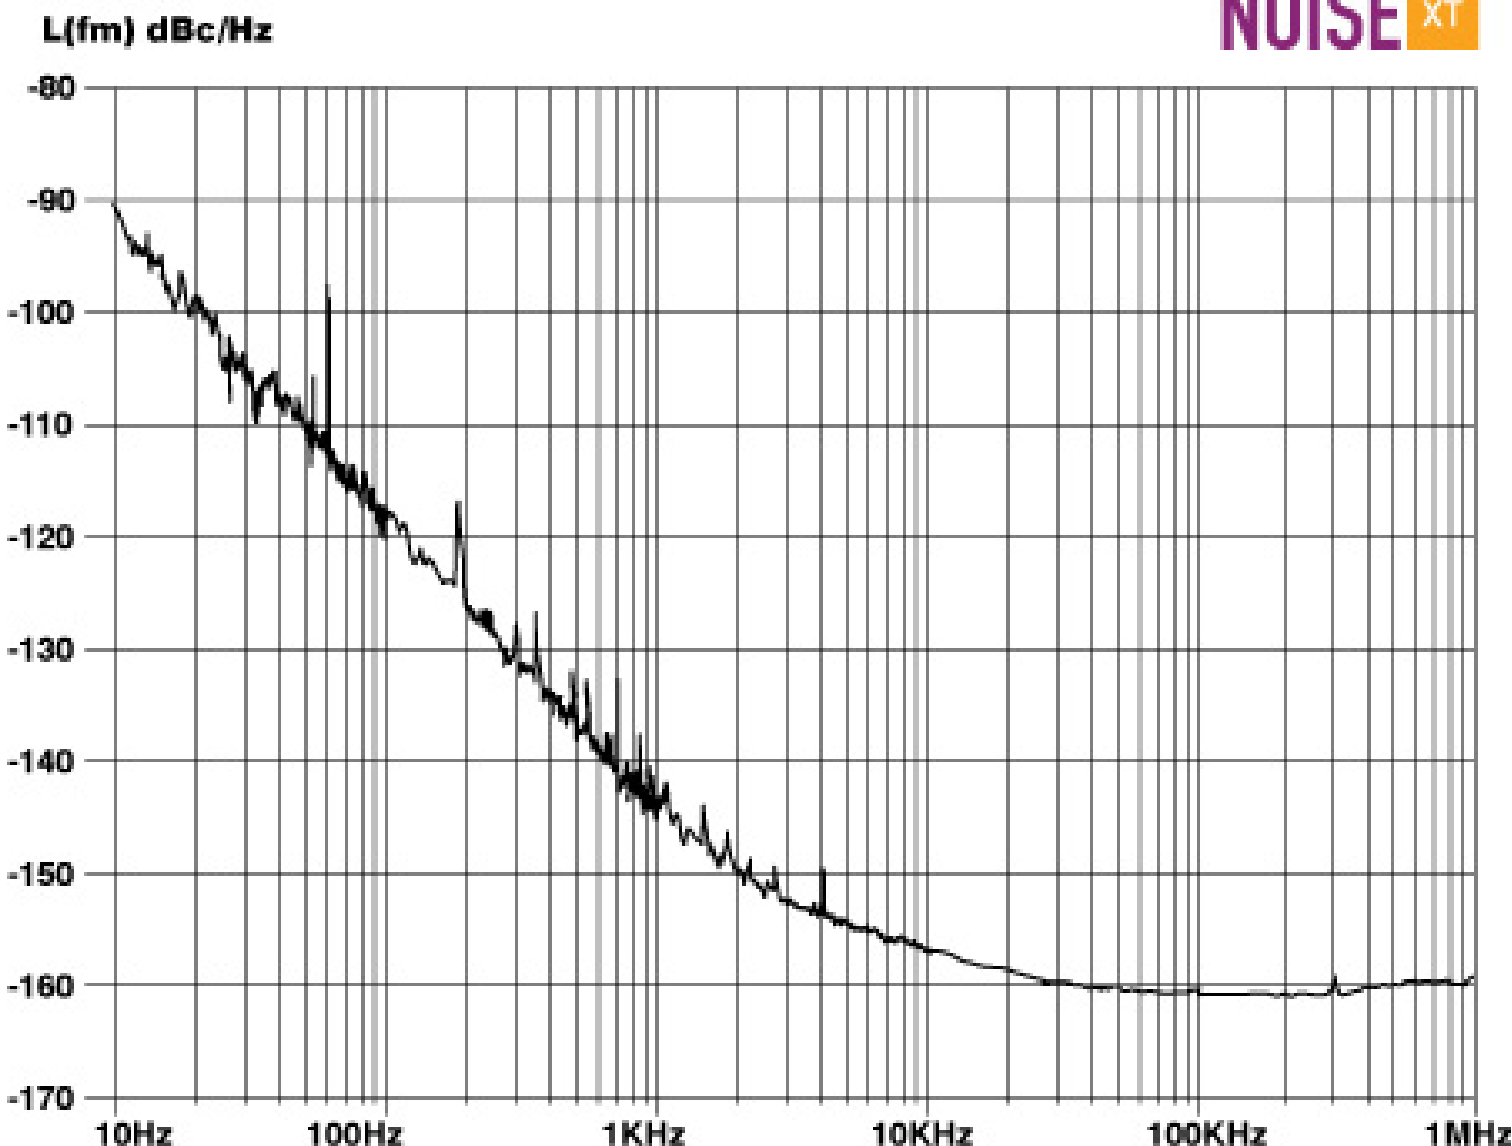

Follow us on LinkedIn for updates on industry news!

NEL Frequency Controls, Inc.

357 Beloit Street • Burlington, WI 53105

Phone: 262.763.3591 • Fax: 262.763.2881 • Email: sales@nelfc.com

www.nelfc.com