


**OE-XBFXXXX-X Series
HF/UHF TCVCXO
Ultra Low Phase Noise**

Rev. G

Description: The OE-XBFXXXX Series of temperature compensated, voltage controlled crystal oscillators (TCVCXO), provides High and Ultra High Frequency with excellent temperature stability, extremely low phase noise and jitter with a variety of different output types in a standard Europack.

Features

- Standard “Europack”
- Very Low Phase Jitter and Phase Noise
- Excellent Frequency Stability
- Ultra High Frequency – up to 2.0 GHz
- Sine-Wave output
- Stratum3 available
- COTS/Dual use

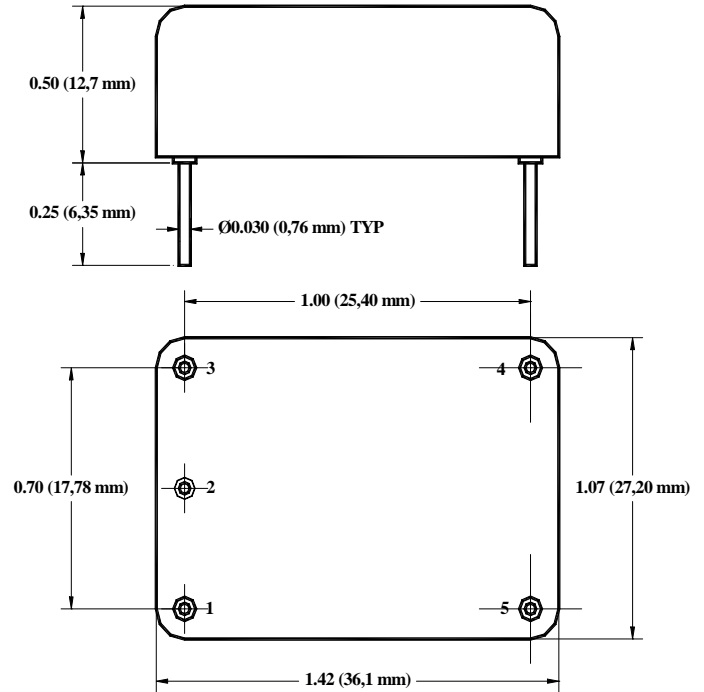

Creating a Part Number

OE - X BF X X X X - X - FREQ

Package Code
OE 5 Pin 36x27mm

Supply Voltage

Code	Specification
0	5V ±5%
A	3.3V ±5%

TCXO/TCVCXO Option

Code	Specification
X	No V. Control
V	W/ V. Control

Output Type

Code	Specification
S	Sine-wave

Environmental

Code	Specification
L	Contains a level of lead that is in excess of RoHS directive and is not designed for reflow
R	RoHS compliant, not designed for reflow

Temp. Frequency Stability

Code	Specification
1	±1.0 ppm
2	±2.5 ppm
3	±0.28 ppm

Temperature Range

Code	Specification
E	-10°C to 60°C
B	0°C to 70°C
C	-20°C to 70°C
D	-40°C to 85°C

Not all combinations available – consult factory

**OE-XBFXXXX-X Series
HF/UHF SMD TCVCXO**

Rev. G

<i>Specifications</i> ⁽¹⁾								
Parameter	Symb	Condition	Min	Typ	Max	Unit	Note	
<i>Electrical</i>								
Frequency Range	F		30		2,000	MHz		
Input Voltage	Vcc		3.135 4.75	3.30 5.0	3.465 5.25	V	A 0	
Input Current	Icc				30 100 140	mA	@100MHz, 3.3V @622MHz, 3.3V @1000MHz, 3.3V	
Frequency Stab.	ΔF/F	Overall, available			±4.6		20 years	
Frequency Stability	ΔF/F	vs. Temperature vs. Vcc aging		±0.5 ±0.1 ±1 ±3.5	±1	ppm ppm/V ppm/year ppm	See chart First Year 10 years	
Calibration	ΔF/F	As shipped, 25°C		±0.5	±1	ppm		
Load		CMOS Sine PECL LVDS	15pf/10K Ohm Internally AC-coupled 50 Ohm 50 Ohm to Vcc-2V or Thevenin equivalent 100 Ohm between the outputs receiving end					
Output power ⁽²⁾	P	Sine-wave Into 50 Ohms <=400MHz	0 4	3 7		dBm	3.3V 5.0V	
		>400MHz	-5 0	0 5	5		3.3V 5.0V	
Start up time	Ts			2	10	ms		
Phase Jitter		1σ		0.4 0.2	1 0.4	ps	100Hz to 20MHz 12KHz to 20MHz	
Subharmonics		PECL, LVDS, Sine PECL, Sine CMOS, Sine		-45 -40	-40 -35 None	dBc	F>250MHz F>1,000MHz F<250MHz	
Spurious					-60	dBc		
Harmonics		Sine-wave		-30	-25 -20	dBc	F<1,000MHz F ≥1,000MHz	
SSB Phase Noise		@10Hz @100 Hz @1 KHz @10 KHz @100 KHz		-80 -110 -140 -155 -160		dBc/Hz	@100MHz	
SSB Phase Noise		@10Hz @100 Hz @1 KHz @10 KHz @100 KHz		-60 -90 -120 -130 -135		dBc/Hz	@1,000MHz	

OE-XBFXXXX-X Series HF/UHF SMD TCVCXO

Rev. G

Electrical (continued)

Parameter	Symb	Condition	Min	Typ	Max	Unit	Note
Input Impedance				> 10KOhm			
Control voltage	Vc		0		3.3	V	
Modulation bandwidth	MB		100 Hz				Contact Factory for wider MB
Deviation		Vc=0V to 3.3V, 25°C	±5	±7		ppm	

- Note 1) All parameters, unless otherwise specified, are at nominal conditions, ie: T=25°C, Nominal Vcc & Nominal Load
 2) Higher output power available – consult factory (current consumption may increase)

Absolute Maximum Ratings

Parameter	Symb	Condition	Min	Typ	Max	Unit	Note
Input Break Down Voltage	Vcc		-0.5		5.5	V	
Storage temp.	Ts		-40		105	° C	
Contr. Voltage	Vc		-1		9	V	

Environmental and Mechanical

Operating temp. range	0°C to 70°C , -40°C to 85°C, see chart, page 1
Mechanical Shock	Per MIL-STD-202, Method 213, Cond. E
Thermal Shock	Per MIL-STD-883, Method 1011, Cond. A
Vibration	Per MIL-STD-883, Method 2007, Cond. A
Soldering Conditions	260°C 10 seconds, leads only
Hermetic Seal	Leak rate less than 1x10 ⁻⁸ atm.cc/s of helium (crystal only)

Electrical Connections

Pin Out	Pin #1- Vc ; Pin#2 – Vref; Pin #3 – Vcc; Pin #4- Output ; Pin #5- GND;
---------	--