


AN-X3BUXXX5-X Series

Rev. E

SMD VCXO Ultra-Low Phase Noise


Description: The AN-X3BUXXX5-X Series of SMD Voltage Controlled crystal oscillators (VCXO), provides extremely low phase noise and jitter with Sine-wave or CMOS output in a small surface mount FR4 based package.



Features

- Small, Low Profile SMD Package
- Ultra-Low Phase Noise
- No Multiplication – no sub-harmonics
- COTS/Dual use

Creating a Part Number

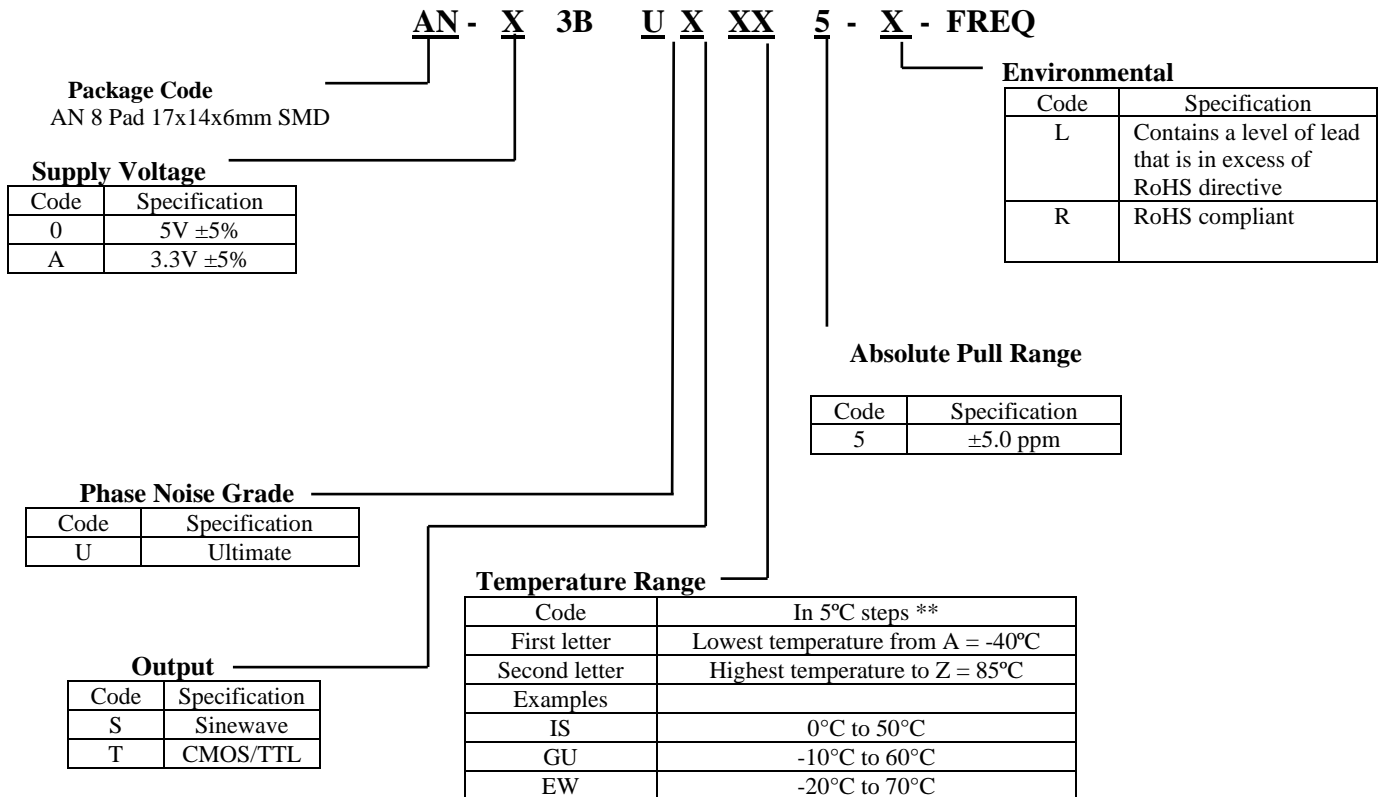


Rev. E

****Temperature Code Table**


Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C
A	-40	F	-15	K	10	P	35	U	60	Z	85
B	-35	G	-10	L	15	Q	40	V	65		
C	-30	H	-5	M	20	R	45	W	70		
D	-25	I	0	N	25	S	50	X	75		
E	-20	J	5	O	30	T	55	Y	80		

*Note: Not all combinations are available

100 MHz example

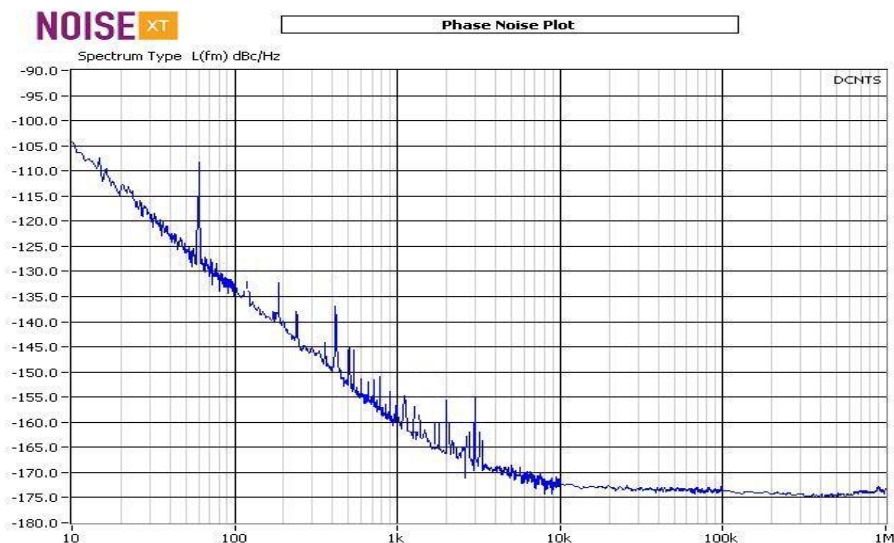

10 MHz example

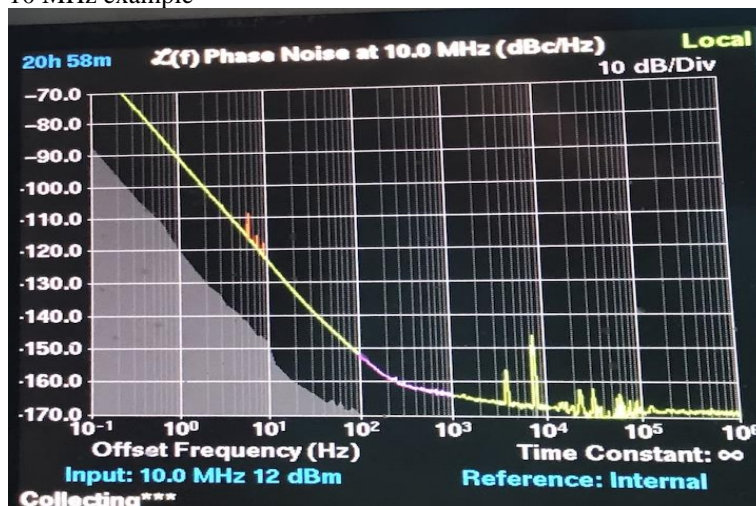

AN-X3BUXXX5-X Series

Rev. E

Note 1) All parameters, unless otherwise specified, are at nominal conditions, i.e.: T=25°C, Nominal Vcc & Nominal Load

Specifications

Parameter	Symb	Condition	Min	Typ	Max	Unit	Note
Electrical							
Frequency Range	F	Sine-wave	10		125	MHz	
Input Voltage	Vcc		3.135 4.75	3.30 5.0	3.465 5.25	V	A 0
Input Current	Icc	Sine			40 10	mA	@100MHz, 3.3V @10 MHz, 3.3 V
Frequency Stability	ΔF/F	vs. Temperature vs. Vcc aging		±10 ±0.1 ±1 ±3 ±4		ppm ppm/V ppm/year ppm ppm	See chart First Year 7 years 10 years
G-sensitivity		Worst Direction		1.0 2.0		ppb/G	100 MHz 10 MHz
Setability	Vset		Vcc/2 - 0.1Vcc	Vcc/2	Vcc/2 + 0.1 Vcc	V	
Load		Sine CMOS	Internally AC-coupled 50 Ohm 10 KOhm // 15 pF				
Output power (output code "S")	P	Sine-wave Into 50 Ohms	7 11	10 13		dBm	3.3V 5.0V
Logic 1 (CMOS)	Voh		0.7Vcc			V	Output Code T
Logic 0 (CMOS)	Vol				0.1V	V	Output Code T
Duty Cycle			45/55		55/45	%	Output Code T
Rise/Fall Time	Tr/Tf			2	3		Output Code T
Spurious		Not setup related			-80	dBc	
Harmonics		Sine-wave		-30	-25	dBc	
SSB Phase Noise	£(Δf)	@ 10 Hz		-95	-126	dBc/Hz	@ 100MHz, Grade U
		@ 100 Hz		-128			
		@ 1 KHz		-152			
		@ 10 KHz		-165			
		@ 100 KHz		-170			
		@ 1 Hz		-90			@ 10 MHz, Grade U
		@ 10 Hz		-120			
		@ 100 Hz		-143			
		@ 1 KHz		-158			
		@ 10 KHz		-160			
		@ 100 KHz		-160			
ADEV		0.1 s to 1 s		1E-11			@ 10 MHz, Grade U
Input Impedance			>10K Ohm				
Control voltage	Vc		0		Vcc	V	
Modulation bandwidth	MB	Flat modulation response	DC		10	KHz	3 dB rollover Max at 10 KHz
Initial Pullability	ΔF/F	As shipped		±20		ppb	
Absolute Pull Range (Guaranteed Capture Range)	ΔF/F	Over All Conditions	±5	±7		ppm	Includes temperature, Vcc variations, and aging 10 years
Absolute Maximum Ratings							
Input Break Down Voltage	Vcc		-0.5		5.5	V	
Storage temper.	Ts		-55		105	°C	
Control Voltage	Vc		-1		5.5	V	




**FREQUENCY
CONTROLS, INC.**

AN-X3BUXXX5-X Series

Rev. E

Environmental and Mechanical

Operating temp. range	-20°C to 70°C MAX, for wider range only 5V Vcc option is available, contact factory, see table to specify.
Mechanical Shock	Per MIL-STD-202, Method 213, Cond. E
Thermal Shock	Per MIL-STD-883, Method 1011, Cond. A
Vibration	Per MIL-STD-883, Method 2007, Cond. A
Soldering Conditions	See MAX reflow profile; The device may be reflowed once. Reflowing upside down is not allowed. NO CLEAN assembly is recommended.
Hermetic Seal	Leak rate less than 1×10^{-8} atm.cc/s of helium (crystal only)

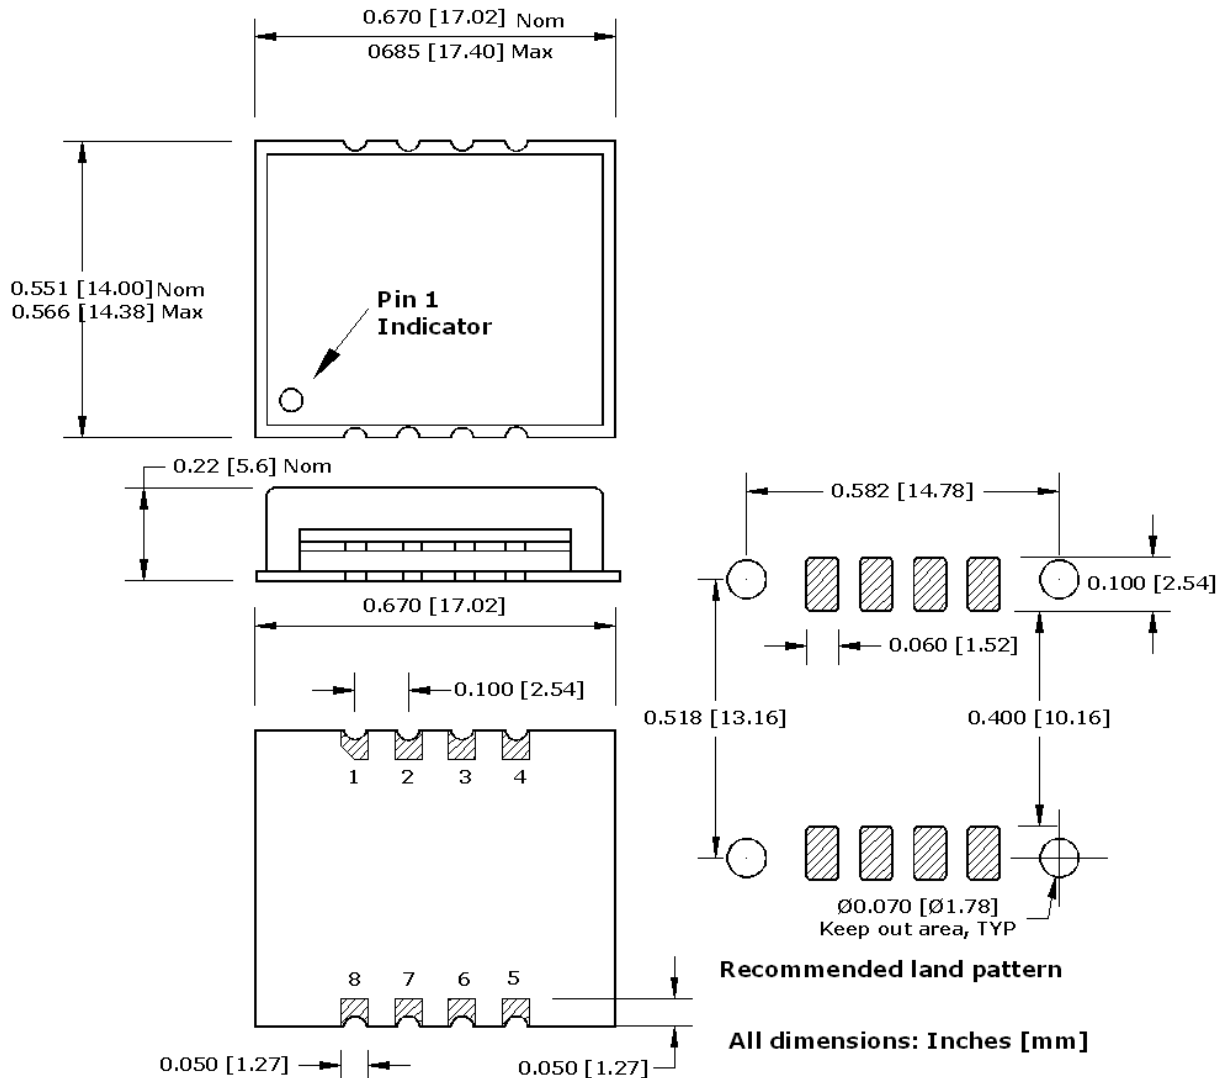


Electrical Connections

Pin out	Pin 1=Vcc; Pin 2, Pin 3, Pin 4, Pin 8 = GND; Pin 5=Output; Pin 6= Voltage Control; Pin 7 Do Not Connect
---------	---

Rev. E

Maximum solder reflow profile

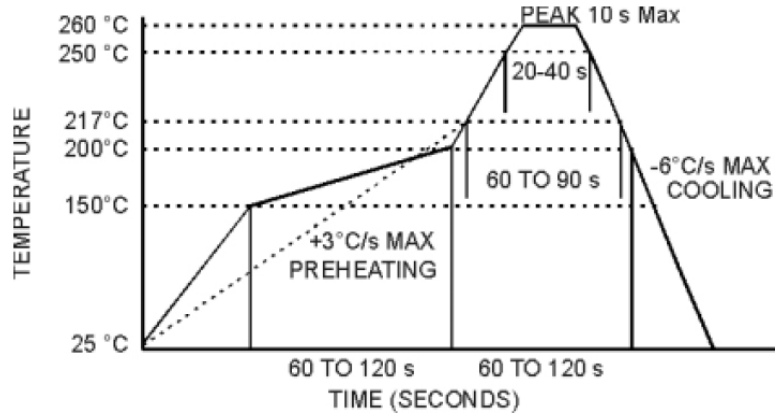

The device may be reflowed once. Reflowing upside down is not allowed. NO CLEAN assembly is recommended.